

UP0151D-() () P SERIES

15 Watt AC/DC Adapter

- ◆ Universal Input 90 to 264 VAC
- ◆ Conductive EMI Meets FCC/CISPR Class B
- ◆ MTBF 350Khrs



SPECIFICATIONS

All specifications are typical at nominal line, full load and 25°C unless otherwise noted.

INPUT SPECIFICATIONS

Input Voltage Range 90-264VAC
Input Frequency 47-63 Hz
Inrush Current 30A max.(Cold Start)

GENERAL SPECIFICATIONS

Hold-up Time 10mS typ.
Leakage Current 0.5mA max.
Short Circuit Protection Continuous
Overvoltage Protection 5VDC output only
Continuous Output Power 15W max.
Hi-pot Isolation: Input / Output 4242 VDC

ENVIRONMENTAL SPECIFICATIONS

Operating Temperature Range 0°C to 50°C
Derating 40°C to 50°C 2%/°C
Temperature Coefficient ± 0.02%/°C
Storage Temperature Range -40°C to +85°C
Humidity, Non-Condensing 0 to 95% RH
Cooling Free- Air Convection
EMI Filter(on Board):
Conducted Meets FCC/CISPR 22 Class B
Specification

OUTPUT SPECIFICATIONS

Model Number	Output Voltage ¹ (Volts)	Output Current (Amps)		Efficiency (typ.)	Ripple ² P-P (mV)	Total Regulation ³
		Min.	Rated			
UP0151D-05P	5	0	2.4	68%	75	± 4%
UP0151D-06P	6	0	2	68%	75	± 4%
UP0151D-09P	9	0	1.33	68%	100	± 3%
UP0151D-12P	12	0	1	73%	100	± 3%
UP0151D-15P	15	0	1	73%	150	± 3%
UP0151D-18P	18	0	0.84	73%	150	± 2%
UP0151D-24P	24	0	0.625	76%	200	± 2%
UP0151D-48P	48	0	0.32	76%	200	± 2%


NOTES:

- The output voltage is set to ± 1%, with the output at rated load.
- Add a 0.1uF ceramic capacitor and a 10uF E.L. capacitor to the output cable. Peak to peak and RMS metering equipment shall have a 20 MHz response with probes and cables maintaining frequency response from 200 Hz to 100MHz bandwidth. Output ripple and spikes are measured directly at the output terminals of the power supply without the use of the probe ground clip.
- Total regulation is defined as the static output regulation at 25°C, including initial tolerance, line voltage within stated limits.

PHYSICAL SPECIFICATION

Weight : 140g

Case Material : PC+ABS Plastic UL94V-0 Flammability Rated

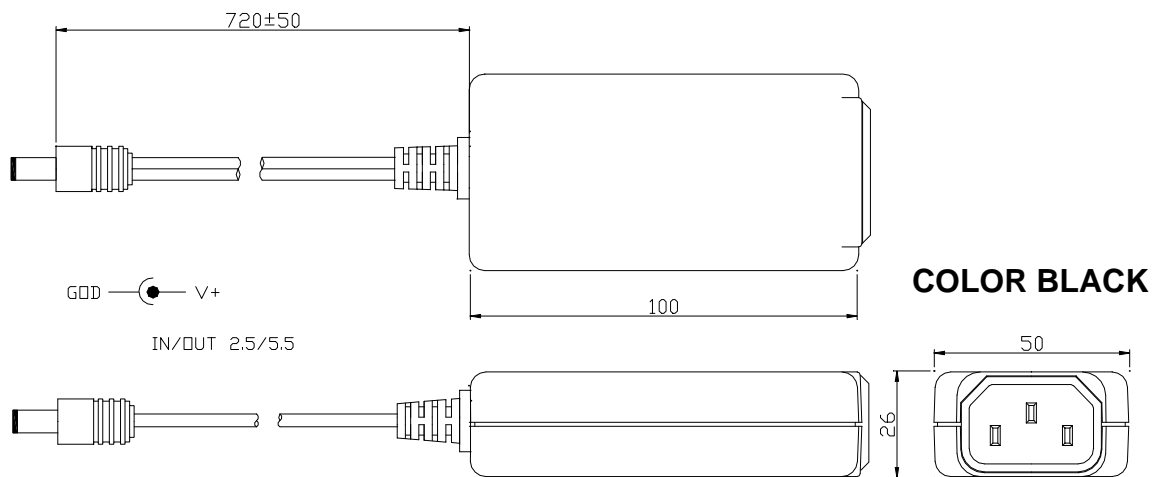

DC plug & pin assignment (CUSTOM DESIGN IS AVAILABLE)

IN 2.5/ OUT5.5 DC PLUG FEMALES

NOTES:

- All dimensions in mm.
- Tolerance(except cable length): ± 1.